


DS-2CE56D5T-IT3 HD1080p TurboHD EXIR Turret Camera

TurboHD™




EXIR

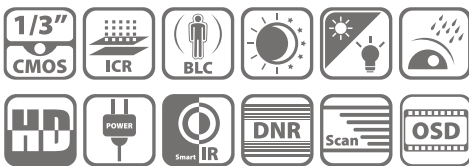

Key Features

- HD1080p Video Output
- HD-TVI Standard Technology
- True Day/Night
- OSD Menu, 3D DNR, Smart IR
- EXIR Technology, 40 Meters IR Range
- IP66 Weatherproof
- Up-the-Coax (UTC) OSD Menu Control
- 120 dB Wide Dynamic Range

Dimensions

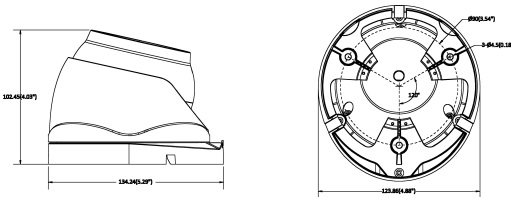

Accessories



Indoor/Outdoor Wall Mount
WMS + P130T



Indoor Wall Mount
WM110



Video Balun
DS-1H18

Order Models

DS-2CE56D5T-IT3

DS-2CE56D5T-IT3	
Camera	
Image Sensor	1/3" progressive scan CMOS
Signal System	NTSC
Effective Pixels	1920 x 1080
Minimum Illumination	0.028 lux @ (f/2.0, AGC on), 0 lux with IR
Shutter Speed	1/25 (1/30) sec. to 1/50,000 sec.
Lens	3.6 mm, f/2.0 (2.8 mm, 6 mm, 12 mm optional) Angle of view: 80.9° (3.6 mm), 103.5° (2.8 mm), 54.3° (6 mm), 24.3° (12 mm)
Lens Mount	M12
Angle Adjustment	Pan: 0° to 360°, tilt: 0° to 90°, rotation: 0° to 360°
Day/Night	IR cut filter
Wide Dynamic Range	120 dB
Synchronization	Internal synchronization
Video Frame Rate	1080p @ 30 fps
HD Video Output	1 analog HD output
CVBS Output	1 V p-p composite output (75 Ω/BNC)
S/N Ratio	More than 52 dB
Menu	
Automatic Exposure	Globe AE/DWDR
AGC	Supported
D/N Mode	Color/BW/EXT
White Balance	ATW, AWC-SET, indoor, outdoor, manual
Motion Detection	Supported, maximum 4 zones
Privacy Mask	8, selectable color or mosaic
BLC	Supported
Anti-Flicker	On/off
Functions	Digital wide dynamic range, 3D digital noise reduction, sharpness, brightness, digital zoom, mirror
General	
Working Temperature/ Humidity	-30° C to 60° C (-22° F to 140° F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC ±10%
Power Consumption	Maximum 5 W
Weather Proof Rating	IP66
IR Range	Up to 40 meters IR range
Communication	Up-the-Coax
Dimensions	φ126.7 × 102.4 mm (φ5" × 4")
Weight	300 g (0.66 lb.)