
HT-325, HT-325B Swivel Blade Stripper

With less force, easy and smooth operation



HT-	Blade holder
HT-325	Plastic
HT-325B	Metal

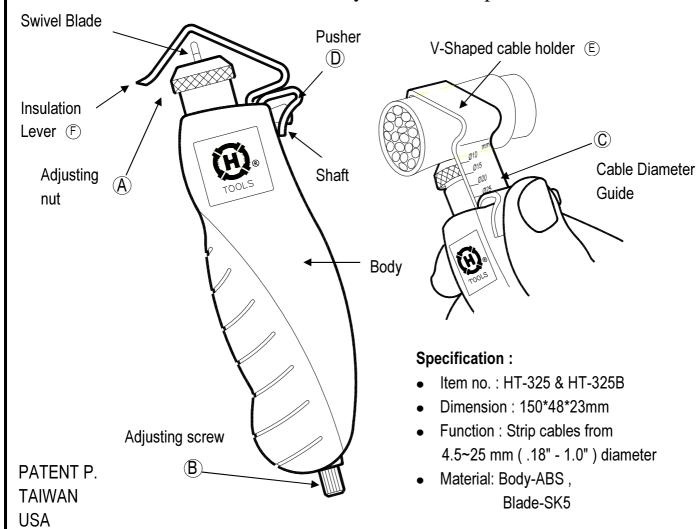

Operation:

- 1. Turn the adjusting nut (4) to get the correct exposed length of blade for the cable and blade height.
- 2. Turn adjusting screw® to get the approximate cable diameter (not critical). This diameter is indicated on cable diameter guide©
- 3. Open the tool by pushing ① upwards, and insert the cable between the blade and the V-shaped holder ⑤ and release.
- 4. Rotate the tool 2-3times in a clockwise direction, to cut round the cable.
- 5. Swivel the blade by pushing the shaft, and pull the stripper along the cable, to make a longitudinal cut.
- 6. Use the sharp edge of the insulation lever (F) to lever insulation from conductor if necessary.

02/26/09 Lydia HT-325B