



Flexible-ID Tape Use on curved sufaces, sharp bends or cylindrical surfaces.

Strong Adhesive Tape Use on uneven, rough and textured surfaces.



Heat-shrink tube Shrinks and grips cable when heat is applied. Prints 5.8, 8.8, 11.7, 17.7mm

> 7: (6, 9, 12, 18, 24, 36, 42 pt) 4: (extended, medium, condensed)

Automatic length labels: left aligned

Pre-set label length: centre aligned

Cable wrap, Cable flag, Face place,

20 languages: (English, German, French,

Norwegian, Swedish, Finnish, Hungarian, Czech, Polish, Romanian, Slovenian, Slovakian, Croatian, Turkish, Brazilian)

Brother

Earth via brotherearth.com

Narrow, half, full, chain print

GS1-128/UCC/EAN128)

Yes, (graphic preview)

7

9

7

lines 5

Yes

Yes

block

Yes No

Yes

Yes, (1-9)

Yes Yes, (inch/mm)

Yes (25-300mm)

384

Technical Specifications

| Hardware | | Built-in software |
|--|---|---|
| Housing dimensions Housing weight Tape size/type Print resolution Max. print height Max. print speed Cutter type Keyboard type Number of keys LCD display LCD backlight LCD backlight | 133 (W) x 220 (H) x 69 (D) mm 740g TZe tape: 3.5, 6, 9, 12, 18mm HSe Heat Shrink Tube: 5.8, 8.8, 11.7, 17.7mm 180 dpi 15.8mm 20mm / sec Manual Cutter blade QWERTY with numeric keypad 64 15 characters x 3 lines graphic Yes Max. 200 chrs 50 memory locations with up to 2,400 characters in total Lithium-ion battery (supplied) AC adapter (supplied) 6 x AA (LR6/HR6) alkaline batteries (not supplied) | Built-in fonts Built-in symbols Character sizes Character widths Font styles Frames Underline Max. number of lines Horizontal alignment Tape length setting Tape margin setting Tab function Specialist Labelling Functions Automatic numbering Mirror printing Vertical printing Barcode creation |
| Items Included | (not supplied) | Copy (repeat) printing |
| | PT-E300 labeller Lithium-ion battery AC adapter 9mm Black on White Strong Adhesive laminated Label (8m) User guide Wrist strap Carrying case | Print preview Auto power off Unit change Language change |






www.brother.com.sg

Label images shown are for illustrative purposes only and some aspects may not be reproducible on this model. Product specifications may be subject to change.

PT-E300VP

brother at vour side

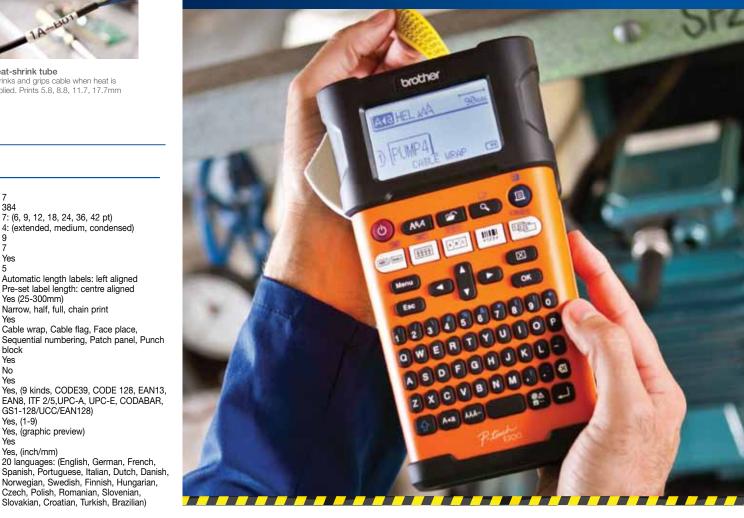

Industrial Electrical Labeller

Dedicated functions for Electrical label applications and easy to create durable labels for faceplates, cables, consumer units, other electrical and datacom installations.



• Over 300 Electrical and Datacom symbols


- Easy to use QWERTY keyboard with dedicated function keys to create Heat Shrink tubes or labels
- Prints on the new 5.8, 8.8, 11.7, 17.7mm Heat Shrink tubes
- Prints 3.5, 6, 9, 12, 18mm TZe, HGe laminated labels
- Large backlight graphic display
- Industry standard barcode compatible
- · Includes tape cassette, Li-ion Battery, AC adapter and Tough carrying case



P-touch PT-E300VP can use the new Heat shrink tube tape in addition to durable TZE or HGe laminated tapes

P-touch PT-E300VP

The P-touch PT-E300VP is an indispensible tool for all electricians and datacom installers. It comes complete with a lithium-ion rechargeable battery and AC adapter, all housed in a durable carrying case. The large backlight graphic LCD, standard QWERTY style keyboard and specialised functions have been developed to make industrial labelling tasks efficient and easy. Use PT-E300VP to leave a professional impression by creating high quality labels for your installations.

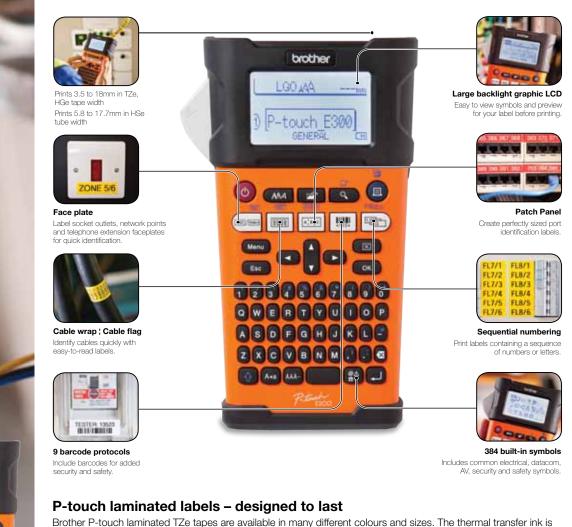

sandwiched between two protective layers of PET (polyester film), protecting the text against the effects of liquids, abrasion, extreme temperature, chemicals and sunlight. As the labels have been tested to the extreme, you can be confident of a professional quality label that has been designed to last.





1A-B01 P-touch E300 (m) (m) (m) (m) 20108 00000000000 38663200000 0000000000 2000000000 0000000

brothe

44,000